

EVERLAST RESIDENTIAL

Residential Electric Water Heaters



Features

- **STAINLESS STEEL** tank constructed of high-quality, lightweight stainless steel making it easier to handle than glass-lined water heaters.
- **TITANIUM HEATING ELEMENTS** two low-wattage density elements to ensure more efficient operation and longer element life.
- **MIXING REDUCING DEVICE** strategically designed to keep the incoming cold water in the lowest part of the tank to reduce mixing in the tank and increase performance and efficiency.
- **INLET DIPTUBE** injects cold water into the bottom of the tank to ensure only the hottest water is drawn from the top of the tank.
- **FULLY AUTOMATIC SURFACE MOUNTED THERMOSTATS** for controlling the temperature, combined with a automatic energy cut-off to prevent overheating.
- **TEMPERATURE AND PRESSURE RELIEF VALVE** – Factory installed.
- **DURABLE BRASS DRAIN VALVE** – Factory installed for fast and easy draining.

Performance

- **UP TO .94 UEF RATING**
- **UP TO 62 GALLON FIRST HOUR RATING (FHR)**
- **240 VOLTS, 4500 OR 5500-WATT INPUT**
- **ENVIRONMENTALLY SAFE NON-CFC FOAM** 2+ inches of super foam insulation for low standby loss
- **MEETS ALL EFFICIENCY REQUIREMENTS OF THE DOE**
- **AHRI CERTIFIED AND LISTED**
- **NAECA III COMPLIANT**

Quality

- **316L STAINLESS STEEL TANK**
- **NO ANODE ROD NEEDED**
- **LIMITED LIFETIME TANK WARRANTY* / 6 YEAR COMPONENTS***



Globally Recognized. Industry Respected.

*With online registration. See product warranty for details.


SPECIFICATIONS AND APPLICATION DATA

MODELS	NOMINAL CAPACITY (GAL)	DOE RATED CAPACITY (GAL)	WATTAGE	VOLTAGE	FIRST HOUR RATING (GAL)	UEF	RECOVERY @ 90°F RISE (GAL)	MIN DELIVERY TEMP	MAX DELIVERY TEMP	HIGH TEMP LIMIT	INLET/OUTLET SIZE
EVR040C2X045N	40	39	4,500	240	56	0.94	20	110°F (43.3°C)	150°F (65.5°C)	170°F (76.6°C)	3/4" NPT
EVR040C2X055N	40	39	5,500	240	56	0.94	25	110°F (43.3°C)	150°F (65.5°C)	170°F (76.6°C)	3/4" NPT
EVR052C2X045N	52	48	4,500	240	62	0.93	20	110°F (43.3°C)	150°F (65.5°C)	170°F (76.6°C)	3/4" NPT
EVR052C2X055N	52	48	5,500	240	62	0.93	25	110°F (43.3°C)	150°F (65.5°C)	170°F (76.6°C)	3/4" NPT

SPECIFICATIONS AND DIMENSIONS

MODELS	DRAIN HEIGHT	T & P HEIGHT	TOP OF HEATER	DIAMETER	WATER CONNECTIONS DISTANCE	SHIPPING WEIGHT
	A	B	C	D	E	
EVR040C2X045N	5 3/4"	46"	54 1/4"	19 1/2"	8"	104
EVR040C2X055N	5 3/4"	46"	54 1/4"	19 1/2"	8"	104
EVR052C2X045N	5 3/4"	58 1/4"	66 3/4"	19 1/2"	8"	118
EVR052C2X055N	5 3/4"	58 1/4"	66 3/4"	19 1/2"	8"	118

TOP VIEW

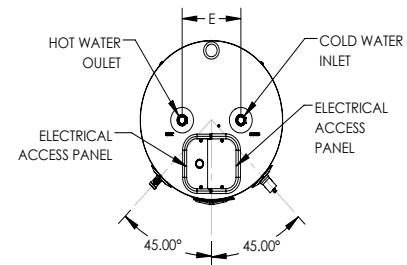

FRONT VIEW

