


resideo

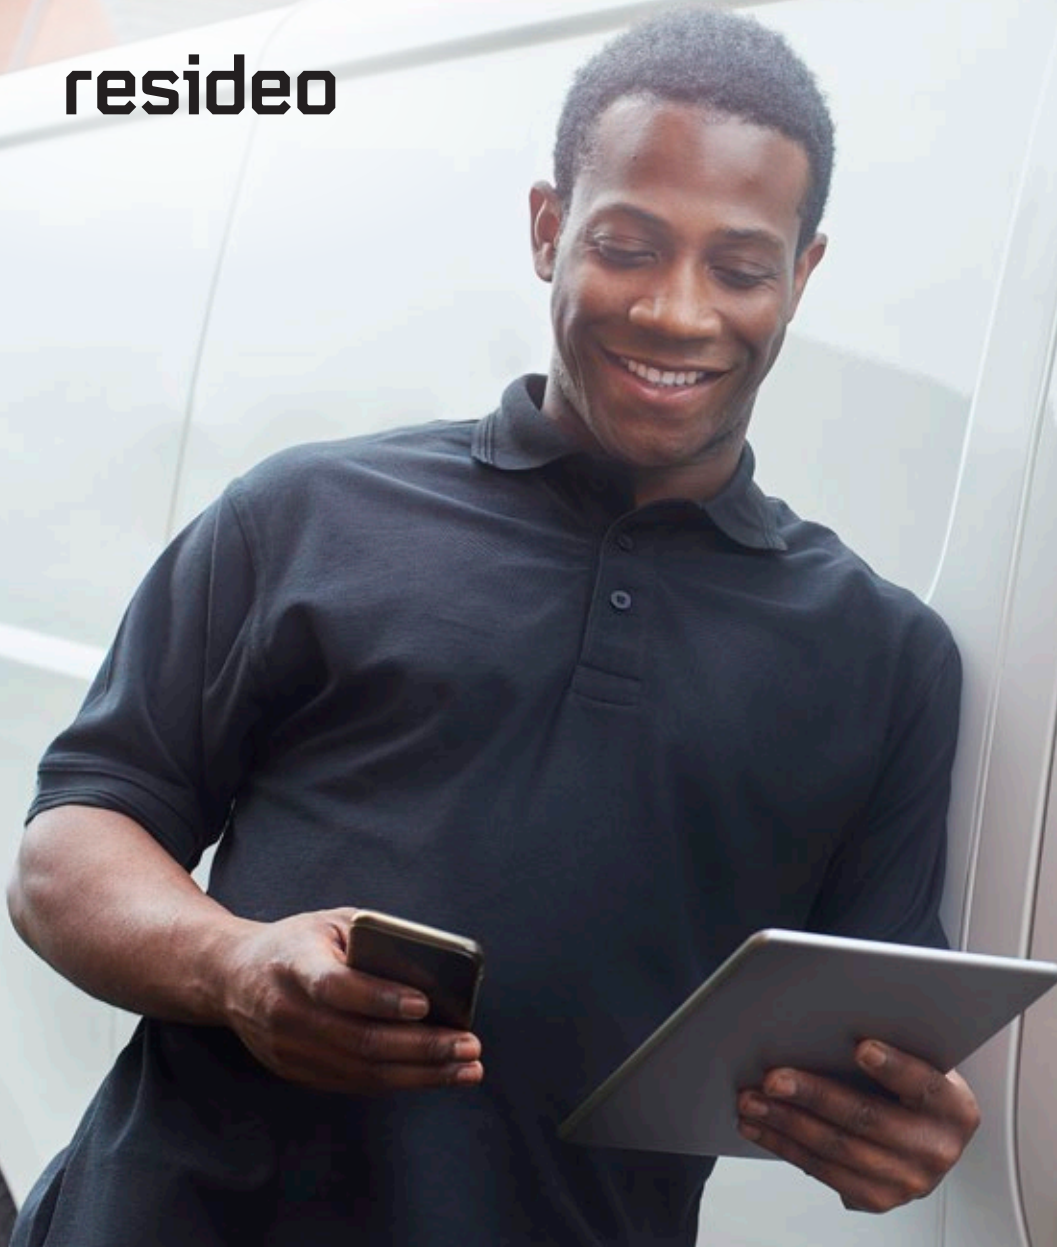

# R8184 PROTECTORELAY<sup>®</sup> OIL PRIMARY CONTROLS

Dependable

Preferred by original equipment manufacturers for their outstanding performance and reliability, the Resideo R8184 Protectorelays<sup>®</sup> are also a great choice for like-for-like filed replacement. Featuring modles for common timings and alarm contacts, the R8184 also offers several mounting options to help you meet every intermittent ignition oil primary application. Because they're so familiar with it and appreciate the easy installation, the dependable R8184 has become a favorite of service technicians.



# R8184 Protectorelay® Oil Primary Controls



From easy installation to reliable performance on a large installed base, the R8184 is what you need. Installed on millions of burners worldwide, the R8184 is built for long service life and easy installation.

- Resideo reliability and quality
- LED diagnostic light
- 2-year warranty

## SMARTLY BUILT

It's not just that the R8184 offers more than just the essentials. It's how they're all put together that makes the R8184 the smart choice. The compact design includes conveniently placed wiring terminals to help speed installation. The unit mounts easily on a 4" x 4" junction box, the burner housing or the appliance cabinet, so you can make it work where you need it to work.

## Resideo Reliability

The R8184 features an integral transformer that powers the control circuit and 45-second safety switch timing. The reset button, manual lockout switch and the status indicator lights are all easily accessible on the front of the unit.

## Oil Primary Feature Comparison/Selection Guide

MODEL	SAFETY SWITCH TIMING	IGNITION TYPE	ALARM CONTACTS	COOLING CONTRACTOR POWER	TEMPERATURE RATING
R8184G4009	45 sec.	Intermittent	No	N/A	-40° to 130° F
R8184G4025	45 sec.	Intermittent	Yes, Powered	N/A	-40° to 130° F
R8184G4066	15 sec.	Intermittent	No	N/A	-40° to 130° F
R8184G4074	30 sec.	Intermittent	No	N/A	-40° to 130° F
R8184G4082	45 sec.	Intermittent	Yes, Dry	N/A	-40° to 130° F
R8184G4090	15 sec.	Intermittent	Yes, Dry	N/A	-40° to 130° F
R8184M1051	45 sec.	Intermittent	No	40 V A transformer Y & G contacts	-40° to 130° F



### Resideo Technologies, Inc.

1985 Douglas Drive North  
Golden Valley, MN 55422  
1-800-468-1502  
resideo.com

### For more information

resideo.com/pro