


### **Model 0010-IFC® Cartridge Circulator**

The High Velocity series 0010-IFC includes an Integral Flow Check, saving installation costs while improving system performance. The removable, spring-loaded IFC® replaces a separate in-line flow check and prevents gravity flow when the circulator is not operating. Available in Cast Iron or Stainless Steel construction.

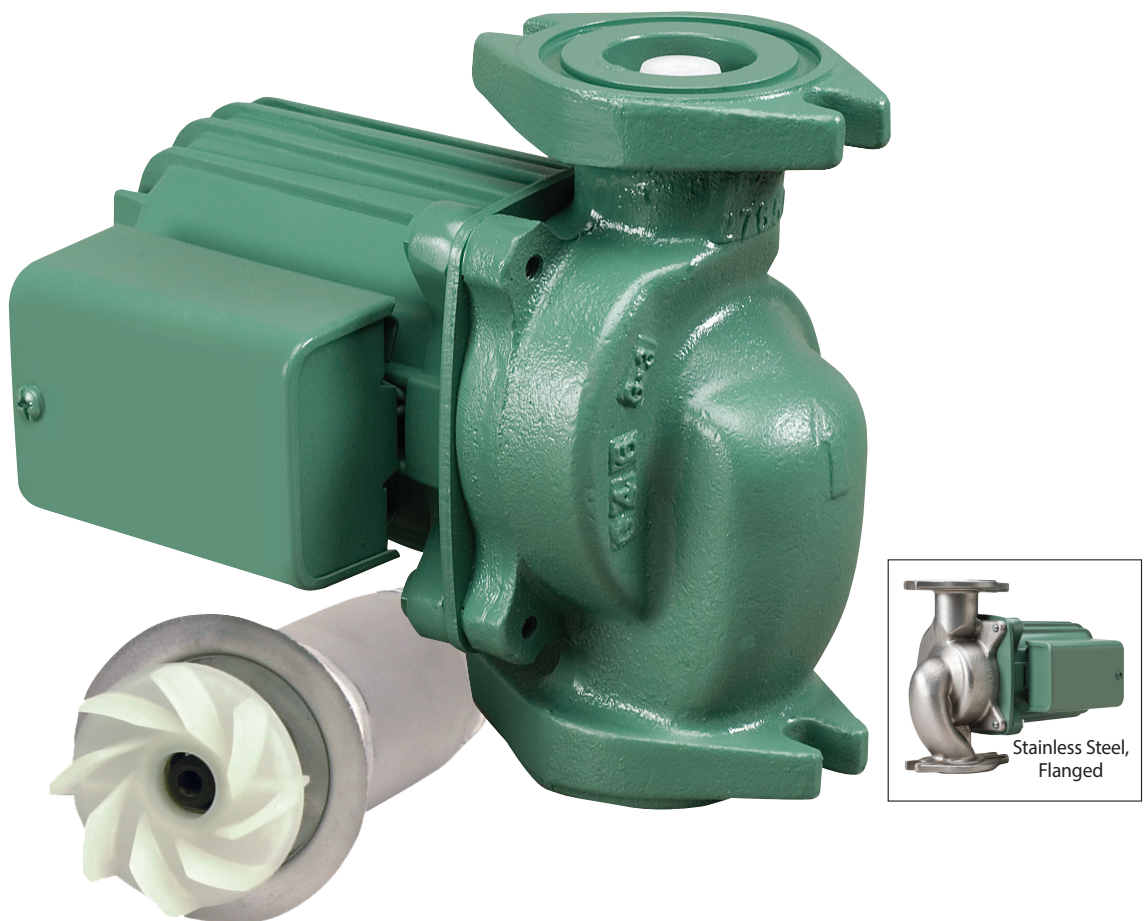

Low-Lead  
Compliant

# Submittal Data Information Model 0010-IFC® Cartridge Circulator

Submittal Data # 101-085  
Supersedes: 01/12/15

Effective: 02/17/16

## Features

- Integral Flow Check (IFC®)
  - Prevents gravity flow
  - Eliminates separate in-line flow check
  - Reduces installed cost, easy to service
  - Improved performance vs. In-line flow checks
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability - Maintenance free
- Quiet, efficient operation
- Direct drive - Low power consumption
- Self lubricating, No mechanical seal
- Standard high capacity output - Compact design
- Wide range of applications
- Cast Iron or Stainless Steel construction, Flanged connections

## Materials of Construction

Casing (Volute): Cast Iron or Stainless Steel  
Integral Flow Check:  
 Body, Plunger.....Acetal  
 O-ring, Seals.....EPDM  
 Spring .....St. Steel  
 Stator Housing:.....Aluminum  
 Cartridge:.....Stainless Steel  
 Impeller: .....Non-Metallic  
 Shaft:.....Ceramic  
 Bearings:.....Carbon  
 O-Ring & Gaskets:.....EPDM


## Model Nomenclature

F – Cast Iron, Flanged  
 SF – Stainless Steel, Flanged  
 IFC – Integral Flow Check

## Performance Data

Max. Flow: 30 GPM  
 Max. Head: 9 Feet  
 Min. Fluid Temperature: 40°F (4°C)  
 Max. Fluid Temperature: 230°F (110°C)  
 Max. Working Pressure: 150 psi  
 Connection Sizes:  
 3/4", 1", 1-1/4", 1-1/2" Flanged

## Certifications & Listings

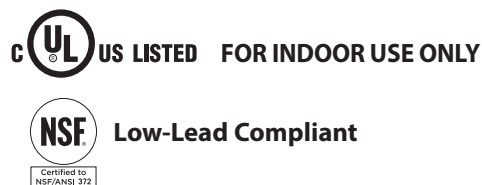


## Application


The 0010-IFC with an Integral Flow Check is designed to reduce installation costs when zoning with 00® circulators. Ideal for residential or light commercial hydronic or radiant heating, hydro-air fan coils, indirect water heaters or domestic water recirculation systems. By locating the IFC inside the pump casing, a separate in-line flow check is eliminated, reducing installation costs. The reduced pressure drop of the IFC increases the flow performance over in-line check valves. Both the IFC and cartridge are easily accessed for service instead of replacing the entire unit. Available in Cast Iron or Stainless Steel construction.

## Pump Dimensions & Weights

Models	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0010-F3-1 IFC	Cast Iron	7-1/4	184	5-5/16	135	3-3/16	81	3-15/16	84	5-3/8	137	6-3/8	162	10	4.5
0010-SF3-IFC	St. Steel	7-1/4	184	5-5/16	135	3-3/16	81	3-15/16	84	5-1/8	137	6-3/8	162	9	4.0

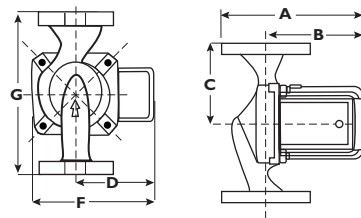


## Mounting Positions

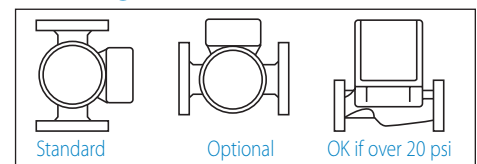

## Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
0010-F3-1 IFC	115	60	1	1.10	3250	1/8
0010-SF3-IFC	115	60	1	1.20	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

## Flange Orientation



## Performance Field - 60Hz

